

EMC Filter



RoHS

FEATURES

- Compact size EMC Filter modules
- Filters provide primary side protection by suppressing AC power surge in compliance with IEC61000-4-5
- Filters input of power supply modules to ensure compliance with CISPR32/EN55032 Class B requirements
- Allows cost-effective converter designs
- Excellent temperature performance
- Flexible mounting options include direct PCB mounting, chassis or DIN-Rail mounting with screw terminals

These filter modules are extremely useful in noise-sensitive analog circuit applications. For compliance with IEC/EN61000-4-5 with surge levels of  $\pm 2kV$  ( $2\Omega$  source resistance)/ $\pm 4kV$  ( $12\Omega$  source resistance) use SFC-L01D on the input side of the AC-DC modules. For higher protection to surge levels of up to  $\pm 4kV$  ( $2\Omega$  source resistance)/ $\pm 6kV$  ( $12\Omega$  source resistance) according to IEC/EN61000-4-5 use module SFC-L01D2 instead, which also ensures compliance to EMI requirements as per CISPR22 /EN 55022 Class B. With EMC filter used to protect SCHMID-M AC-DC converter modules, the system's max. Input voltage and Input current must not exceed the EMC filter's maximum Voltage and/or nominal current specifications.

Selection Guide

Model	Input Voltage Range (VAC)	Nominal Current (A)(max)
SFC-L01D*	85-305	0.5
SFC-L01D2*	85-305	0.5

\*Note: Series with suffix "A2" are chassis mounting, with suffix "A4" are DIN-Rail mounting.

General Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		-40	--	85	°C
Storage Temperature		-40	--	105	
Case Temperature Rise	220VAC @0.05A	--	--	5	
	220VAC @0.25A	--	--	20	
	220VAC @0.5A	--	--	30	
Leakage current (line to ground)	2000VAC, tested for 1 minute	--	2	--	mA

Mechanical Specifications

Case Material	Flame-retardant package, meets UL94V-0				
Dimensions	SFC-L01D	Horizontal package	48.50 × 36.00 × 20.50 mm		
		A2 wiring package	96.10 × 54.00 × 29.00 mm		
		A4 rail package	96.10 × 54.00 × 33.60 mm		
	SFC-L01D2	Horizontal package	62.00 × 45.00 × 22.50 mm		
		A2 wiring package	96.10 × 54.00 × 31.00 mm		
		A4 rail package	96.10 × 54.00 × 35.60 mm		
Weight	SFC-L01D	Horizontal package/A2 wiring package/		50.0g/100.0g/140.0g (Typ.)	
	SFC-L01D2	A4 rail package		85.0g/135.0g/175.0g (Typ.)	

Frequency Attenuation Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit	
Frequency attenuation coefficient	150KHz—1GHz	SFC-L01D	--	20	--	dB
		SFC-L01D2	--	30	--	

# EMC Filter


## SFC-L01D & SFC-L01D2 Series

### Standards Compliance


SFC-L01D filter module on the input of AC/DC converters are design to meet Surge levels up to  $\pm 2\text{kV}$  ( $2\Omega$  source resistance) /  $\pm 4\text{kV}$  ( $12\Omega$  source resistance) per IEC/EN61000-4-5. Using filter module SFC-L01D2 instead to meet higher surge levels up to  $\pm 4\text{kV}$  ( $2\Omega$  source resistance)/  $\pm 6\text{kV}$  ( $12\Omega$  source resistance) per IEC/EN61000-4-5 and EMI requirements according to CISPR22/EN55022 Class B.

### Electromagnetic Compatibility (EMC)

#### ① SFC-L01D Surge Test Result

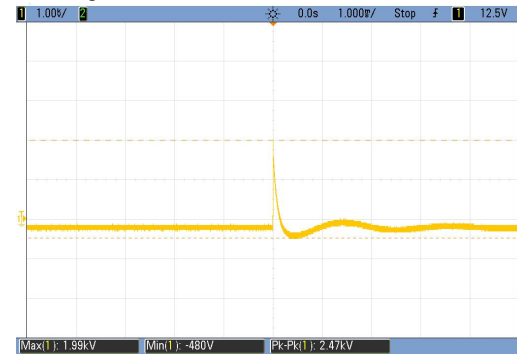


Input voltage waveform (Differential mode 1.99KV)

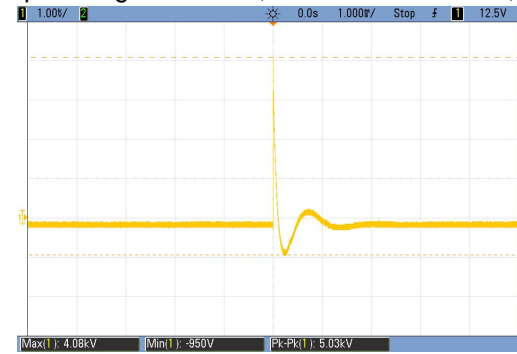


Input voltage waveform (Common mode 4.084.62KV)

Note: Above result was based on open-circuit test.

#### ② SFC-L01D2 Surge Test Result

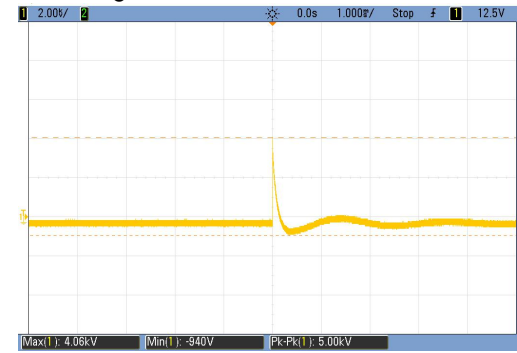

Input voltage waveform (Differential mode 4.06KV)

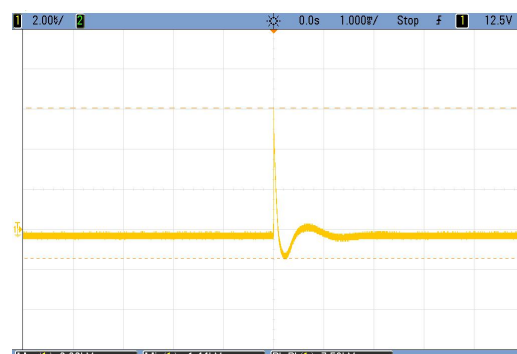

Input voltage waveform (Common mode 6.06KV)


Note: Above result was based on open-circuit test.




Output voltage waveform (0.9 KV)



Output voltage waveform(0.71 KV)

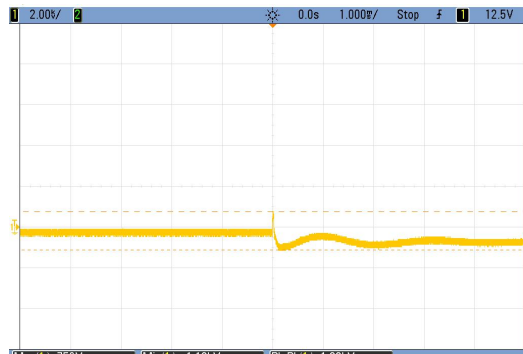

Output voltage waveform (0.75KV)

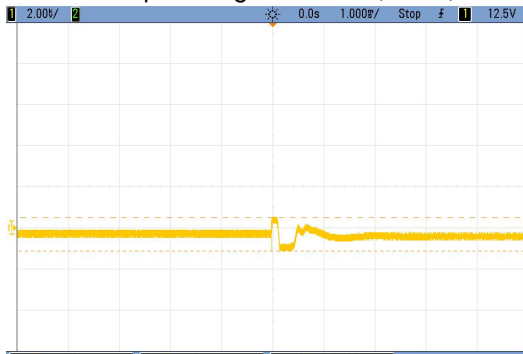

Output voltage waveform(0.5KV)

# EMC Filter

## SFC-L01D & SFC-L01D2 Series

### Design Reference

#### 1. Internal schematic

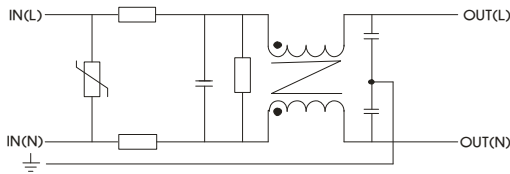


Fig.1 SFC-L01D


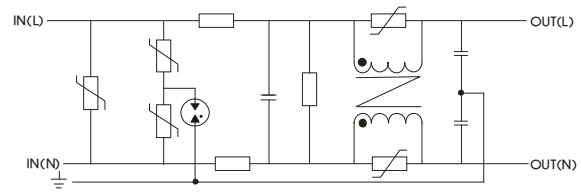


Fig. 2 SFC-L01D2

#### 2. Typical application

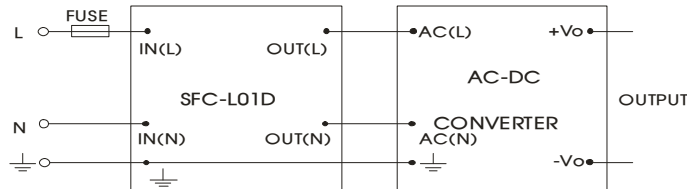

FUSE: Input currents can vary with different power modules. Therefore please refer to the individual specifications of the power converter used to identify the correct fuse values and make sure not to exceed the filter's maximum specifications.

#### 3. Compliance table when Filters are used with following Converter products


Converter	EMI (without external circuit)	EMI (with EMC filter)	EFT (without external circuit)	EFT (with EMC filter)	Surge (without external circuit)	Surge (with SFC-L01D)	Surge (with SFC-L01D2)
SLB(03-25)-10BXX(LT) Series	CISPR22/EN 55022 CLASS B	--	IEC/EN61000-4-4 ±2KV	IEC/EN61000-4-4 ±4KV	IEC/EN61000-4-5 ±1KV/±2KV	IEC/EN61000-4-5 ±2KV/±4KV	--
SLD(01-02)-10BXX Series	CISPR22/EN 55022 CLASS B	--	--	IEC/EN61000-4-4 ±2KV	--	IEC/EN61000-4-5 ±1KV/±2KV	--
SLD03-10BXX Series	CISPR22/EN 55022 CLASS A	CISPR22/EN55022 CLASS B	--	IEC/EN61000-4-4 ±2KV	--	IEC/EN61000-4-5 ±1KV/±2KV	--
SLD05-20BXX Series	CISPR22/EN 55022 CLASS A	CISPR22/EN55022 CLASS B	IEC/EN61000-4-4 ±2KV	IEC/EN61000-4-4 ±4KV	IEC/EN61000-4-5 ±1KV/±2KV	IEC/EN61000-4-5 ±2KV/±4KV	--
SLD05-23BXX Series	CISPR22/EN 55022 CLASS B	--	IEC/EN61000-4-4 ±2KV	IEC/EN61000-4-4 ±4KV	IEC/EN61000-4-5 ±1KV	IEC/EN61000-4-5 ±2KV/±4KV	--
SLD10-20BXX Series	CISPR22/EN 55022 CLASS A	CISPR22/EN55022 CLASS B	IEC/EN61000-4-4 ±2KV	IEC/EN61000-4-4 ±4KV	IEC/EN61000-4-5 ±1KV	IEC/EN61000-4-5 ±2KV/±4KV	--
SLD10-20BXX Series	CISPR22/EN 55022 CLASS A	CISPR22/EN55022 CLASS B	IEC/EN61000-4-4 ±2KV	IEC/EN61000-4-4 ±4KV	IEC/EN61000-4-5 ±1KV	IEC/EN61000-4-5 ±2KV/±4KV	--
SLD10-23BXX Series	CISPR22/EN 55022 CLASS B	--	IEC/EN61000-4-4 ±2KV	IEC/EN61000-4-4 ±4KV	IEC/EN61000-4-5 ±1KV	IEC/EN61000-4-5 ±2KV/±4KV	--
SLD12-20BXX Series	CISPR22/EN 55022 CLASS B	--	IEC/EN61000-4-4 ±4KV	--	IEC/EN61000-4-5 ±2KV	--	IEC/EN61000-4-5 ±4KV/±6KV
SLD20-10BXX Series	CISPR22/EN 55022 CLASS B	--	IEC/EN61000-4-4 ±4KV	--	IEC/EN61000-4-5 ±2KV	--	IEC/EN61000-4-5 ±4KV/±6KV

# EMC Filter


## SFC-L01D & SFC-L01D2 Series

Model	EMI(without external circuit)	EMI(with EMC filter)	EFT (without external circuit)	EFT (with EMC filter)	Surge(without external circuit)	Surge(with SFC-L01D)	Surge(with SFC-L01D2)
SLH Series	CISPR22/E N55022 CLASS B	--	IEC/EN61000-4-4 ±2KV	IEC/EN61000-4-4 ±4KV	IEC/EN61000-4-5 ±1KV/±2KV	IEC/EN61000-4-5 ±2KV/±4KV	--
Dedicated Power Converter For Power System SLH(ER2) Series	CISPR22/E N55022 CLASS A	CISPR22/E N55022 CLASS B	IEC/EN61000-4-4 ±4KV	--	IEC/EN61000-4-5 ±2KV/±4KV	--	EC/EN61000-4-5 ±4KV/±6KV
SLM30-00J0512-03E	CISPR22/E N55022 CLASS B	--	IEC/EN61000-4-4 ±4KV	--	IEC/EN61000-4-5 ±2KV/±4KV	--	EC/EN61000-4-5 ±4KV/±6KV

### SFC-L01D Dimensions and Recommended Layout

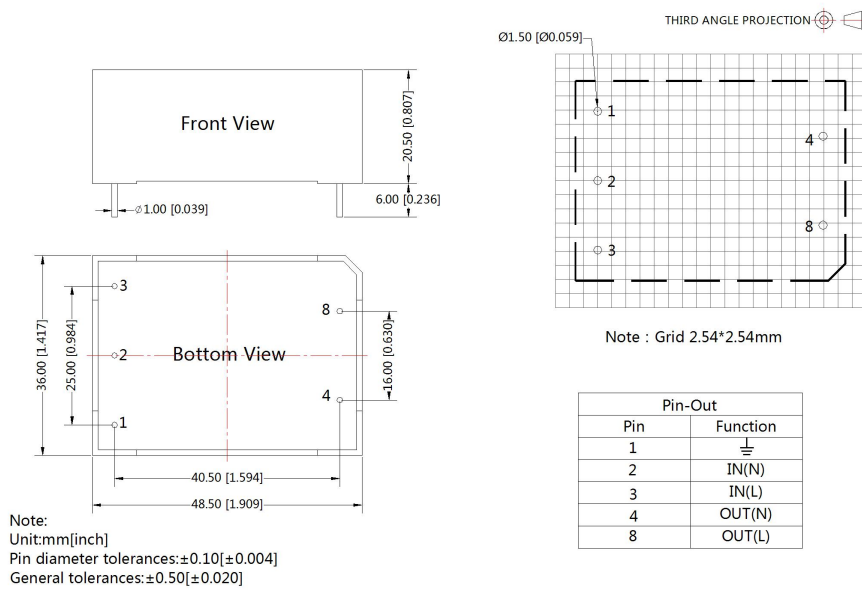


### SFC-L01D2 Dimensions and Recommended Layout

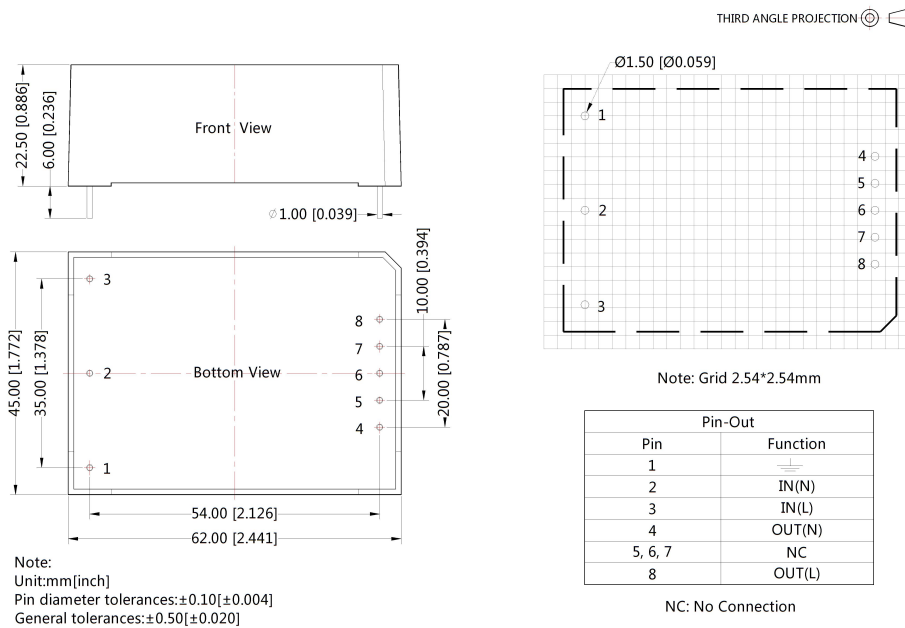

# EMC Filter

## SFC-L01D & SFC-L01D2 Series

### SFC-L01DA2 & SFC-L01D2A2 Dimensions

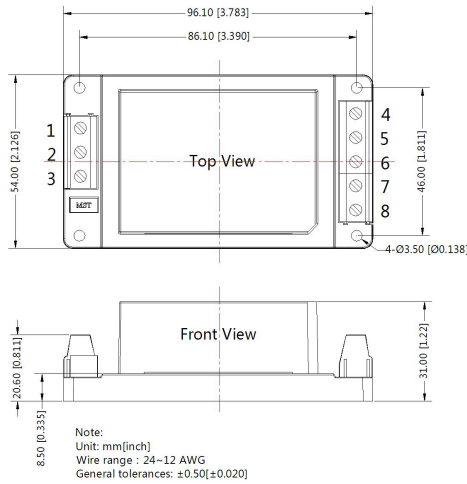


THIRD ANGLE PROJECTION

Pin	FC-L01DA2	FC-L01D2A2
1	⊕	⊕
2	IN(N)	IN(N)
3	IN(L)	IN(L)
4	OUT ( N )	OUT ( N )
5	NC	NC
6	NC	NC
7	NC	NC
8	OUT ( L )	OUT ( L )

\*The figure above is related to FC-L01D2A2 series, the height of other series is different.

OUTLINE AND DIMENSIONS	
MODEL	DIMENSIONS
FC-L01DA2	96.1*54*29.0mm
FC-L01D2A2	96.1*54*31.0mm

### SFC-L01DA4 & SFC-L01D2A4 Dimensions

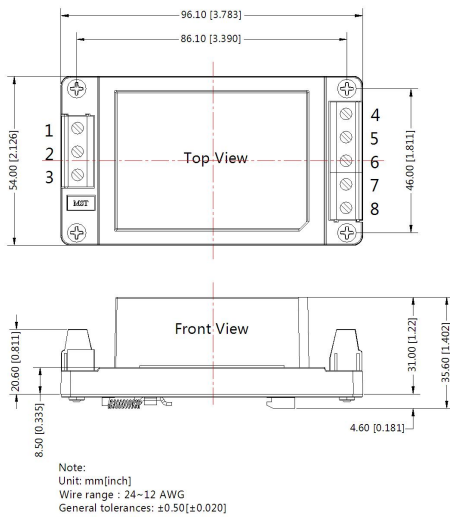

THIRD ANGLE PROJECTION

Pin	FC-L01DA4	FC-L01D2A4
1	⊕	⊕
2	IN(N)	IN(N)
3	IN(L)	IN(L)
4	OUT ( N )	OUT ( N )
5	NC	NC
6	NC	NC
7	NC	NC
8	OUT ( L )	OUT ( L )

\*The figure above is related to FC-L01D2A4 series, the height of other series is different.

OUTLINE AND DIMENSIONS	
MODEL	DIMENSIONS
FC-L01DA4	96.1*54*33.6mm
FC-L01D2A4	96.1*54*35.6mm

**Note:**

1. The maximum capacitive load offered were tested at input voltage range and full load;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on [company](#) corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.