

10W, AC-DC converter



FEATURES

- Ultra-wide 85 - 305VAC and 100 - 430VDC input voltage range
- Operating ambient temperature range: -40°C to +85°C
- Up to 85% efficiency
- No-load power consumption < 0.1W
- 5000m altitude application
- EMI performance meets CISPR32/EN55032 CLASS B, EN55014
- IEC/EN/UL62368/EN60335/EN61558 safety approval



SLD10-23BxxR2 series AC-DC converters is one of SCHMID-M's new generation compact size power converter. It features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368/EN60335/EN61558 standards. The converters are widely used in industrial, power, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Certification	Part No.*	Output Power	Nominal Output Voltage and Current	Efficiency at 230VAC (%) Typ.	Capacitive Load (µF) Max.
UL/CE/CB	SLD10-23B03R2	8.6W	3.3V/2600mA	74	6600
	SLD10-23B05R2	10W	5V/2000mA	79	5000
	SLD10-23B09R2		9V/1100mA	81	3600
	SLD10-23B12R2		12V/830mA	84	2000
	SLD10-23B15R2		15V/660mA	84	820
	SLD10-23B24R2		24V/410mA	85	470

Note: * Use suffix "A2S" for chassis and suffix "A4S" for DIN-Rail mounting.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	100	--	430	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	0.23	A
	230VAC	--	--	0.15	
Inrush Current	115VAC	--	25	--	A
	230VAC	--	40	--	
Leakage Current	277VAC/50Hz	0.1mA RMS Max.			
Fuse(A2S/A4S package series include fuse)		2A/300V, slow-blow, required			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy		--	±2	--	%	
Line Regulation	Full load	--	±0.5	--		
Load Regulation	0%-100% load	--	±1	--		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	50	100	mV	
Stand-by Power Consumption	230VAC	3.3/5/9/12/15V	--	0.10	--	W
		24V	--	0.12	--	
Temperature Coefficient		--	±0.02	--	%/°C	

AC/DC Converter

SLD10-23BxxR2 Series

Short Circuit Protection		Hiccup, continuous, self-recovery			
Over-current Protection		≥110%Io, self-recovery			
Over-voltage Protection	3.3/5 V	≤7.5VDC (Output voltage clamp or hiccup)			
	9 V	≤15VDC (Output voltage clamp or hiccup)			
	12/15 V	≤20VDC (Output voltage clamp or hiccup)			
	24 V	≤30VDC (Output voltage clamp or hiccup)			
Minimum Load		0	--	--	%
Hold-up Time	115VAC	--	8	--	ms
	230VAC	--	40	--	

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation	Input-Output	Electric Strength Test for 1min., leakage current <5mA	4000	--	--	VAC	
Insulation Resistance	Input-Output	At 500VDC	100	--	--	MΩ	
Operating Temperature			-40	--	+85	°C	
Storage Temperature			-40	--	+85		
Storage Humidity			--	--	95	%RH	
Soldering Temperature		Wave-soldering	260 ± 5°C; time: 5 - 10s				
		Manual-welding	360 ± 10°C; time: 3 - 5s				
Switching Frequency			--	65	--	kHz	
Power Derating	-40°C to -25°C	85VAC - 115VAC	2.2	--	--	% / °C	
	+50°C to +70°C	3.3/5V	2.5	--	--		
	+55°C to +70°C	9/12/15/24V	3.33	--	--		
	+70°C to +85°C		0.66	--	--		
	85VAC - 100VAC			0.83	--	--	%/VAC
	2000m - 5000m			0.67	--	--	%/Km
Safety Standard			UL/EN/IEC62368/EN60335/EN61558				
Safety Certification			UL/EN/IEC62368/EN60335/EN61558				
Safety Class			CLASS II				
MTBF			MIL-HDBK-217F@25°C > 3200,000 h				
Designed life	230VAC	Ta: 25°C 100% load	>130x10 ³ h				
		Ta: 55°C 100% load	>20x10 ³ h				
		Ta: 55°C 80% load	>27x10 ³ h				

Mechanical Specifications

Case Material		Black plastic, flame-retardant and heat-resistant (UL94V-0)
Dimension	DIP package	40.00 x 25.40 x 21.00 mm
	A2S chassis mounting	76.00 x 31.50 x 29.80 mm
	A4S Din-Rail mounting	76.00 x 31.50 x 34.40 mm
Weight	DIP mounting	34g (Typ.)
	A2S chassis mounting	54g (Typ.)
	A4S Din-Rail mounting	74g (Typ.)
Cooling method		Free air convection




AC/DC Converter

SLD10-23BxxR2 Series



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B	
		EN55014-1	
Emissions	RE	CISPR32/EN55032 CLASS B	
		EN55014-1	
Immunity	ESD	IEC/EN 61000-4-2 Contact $\pm 8KV$ /Air $\pm 15KV$	Perf. Criteria B
		EN55014-2	Perf. Criteria B
	RS	IEC/EN61000-4-3 10V/m	perf. Criteria A
		EN55014-2	perf. Criteria A
	EFT	IEC/EN61000-4-4 $\pm 2KV$	perf. Criteria B
		IEC/EN61000-4-4 $\pm 4KV$ (See Fig.2 for recommended circuit)	perf. Criteria B
		EN55014-2	perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line $\pm 1KV$	perf. Criteria B
		IEC/EN61000-4-5 line to line $\pm 2KV$ (See Fig.2 for recommended circuit)	perf. Criteria B
		EN55014-2	perf. Criteria B
	CS	IEC/EN61000-4-6 10Vr.m.s	perf. Criteria A
		EN55014-2	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11 0%, 70%	perf. Criteria B
		EN55014-2	perf. Criteria B

Product Characteristic Curve

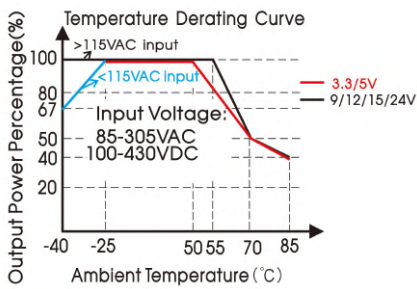

Note: ① With an AC input between 85-115VAC and a DC input between 100-165VDC, the output power must be derated as per temperature derating curves;
 ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

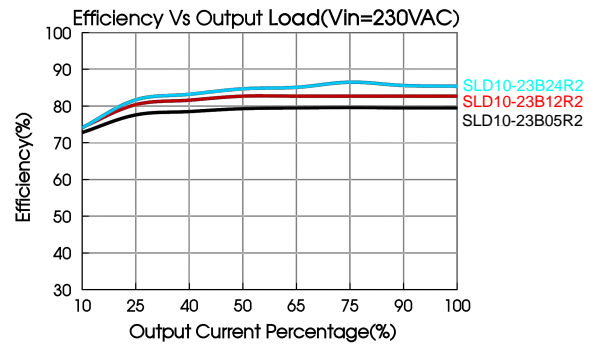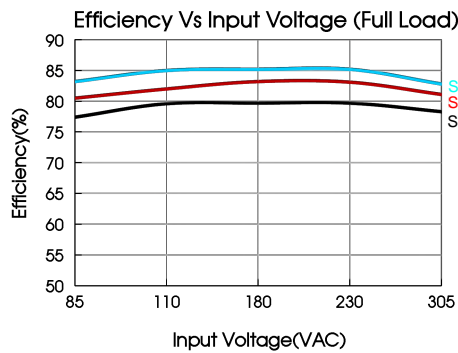

AC/DC Converter

SLD10-23BxxR2 Series

Design Reference

1. Typical application

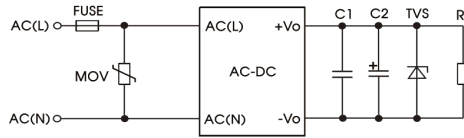


Fig. 1: Typical circuit diagram

Part No.	FUSE	MOV	C1(μF)	C2(μF)	TVS
SLD10-23B03R2	2A/300V, slow-blow, required	S10K350	1μF/50V	220μF/16V	SMBJ7.0A
SLD10-23B05R2				220μF/16V	SMBJ7.0A
SLD10-23B09R2				100μF/25V	SMBJ12A
SLD10-23B12R2				100μF/25V	SMBJ20A
SLD10-23B15R2				100μF/25V	SMBJ20A
SLD10-23B24R2				100μF/35V	SMBJ30A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit



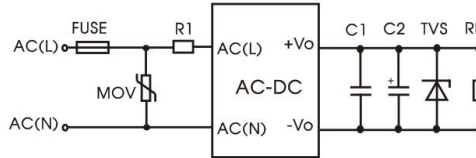


Fig 2: EMC application circuit with higher requirements


Component	Recommended value
FUSE	2A/300V, slow-blow, required
MOV	S14K350
R1	6.8 Ω /3W

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION



Note: Grid 2.54*2.54mm



Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	No Pin
4	+Vo
5	No Pin
6	-Vo


Note:
Unit: mm[inch]
Pin diameter tolerances: ±0.10[±0.004]
General tolerances: ±0.50[±0.020]

AC/DC Converter

SLD10-23BxxR2 Series

A2S Dimensions

THIRD ANGLE PROJECTION 

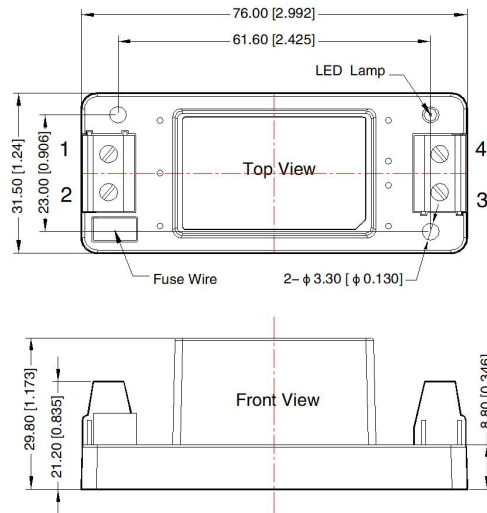


Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Note:
 Unit: mm[inch]
 Wire range: 24-12 AWG
 Tightening torque: Max 0.4 N·m
 General tolerances: ± 1.00 [± 0.039]

A4S Dimensions

THIRD ANGLE PROJECTION 

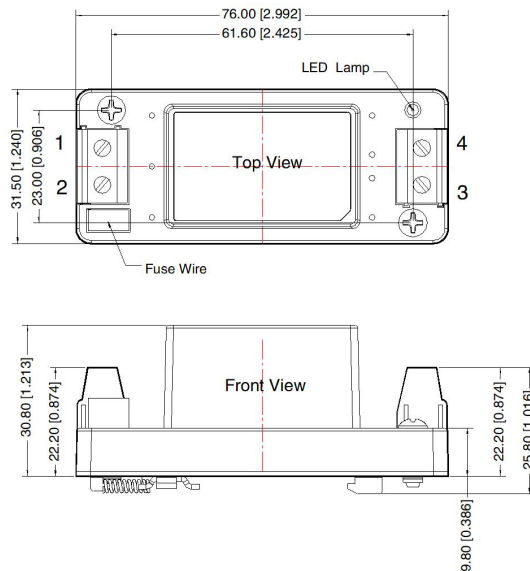

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Note:
 Unit: mm[inch]
 Wire range: 24-12 AWG
 Tightening torque: Max 0.4 N·m
 Mounting rail: TS35, rail needs to connect safety ground
 General tolerances: ± 1.00 [± 0.039]

Note:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.