

2W isolated DC-DC converter  
Fixed input voltage, unregulated single output



Patent Protection RoHS



## FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 86%
- Compact SMD package
- I/O isolation test voltage 1.5k VDC
- Industry standard pin-out

SB05\_XT-2WR3 series are designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

## Selection Guide

| Certification | Part No.      | Input Voltage (VDC) | Output        |                          | Full Load Efficiency (%)<br>Min./Typ. | Capacitive Load<br>(µF)Max. |
|---------------|---------------|---------------------|---------------|--------------------------|---------------------------------------|-----------------------------|
|               |               | Nominal (Range)     | Voltage (VDC) | Current(mA)<br>Max./Min. |                                       |                             |
| -             | SB0503XT-2WR3 | 5<br>(4.5-5.5)      | 3.3           | 400/40                   | 74/78                                 | 2400                        |
|               | SB0505XT-2WR3 |                     | 5             | 400/40                   | 80/84                                 | 2400                        |
|               | SB05X7XT-2WR3 |                     | 7             | 286/29                   | 80/84                                 | 1000                        |
|               | SB0509XT-2WR3 |                     | 9             | 222/22                   | 81/85                                 | 1000                        |
|               | SB0512XT-2WR3 |                     | 12            | 167/17                   | 81/85                                 | 560                         |
|               | SB0515XT-2WR3 |                     | 15            | 133/13                   | 82/86                                 | 560                         |
|               | SB0524XT-2WR3 |                     | 24            | 83/8                     | 82/86                                 | 220                         |

## Input Specifications

| Item                                   | Operating Conditions | Min.               | Typ. | Max.  | Unit   |    |
|--|----------------------|--------------------|------|-------|--------|----|
| Input Current<br>(full load / no-load) | 5VDC input           | 3.3VDC output      | --   | 339/8 | 357/-- | mA |
|  |                      | 5VDC/7VDC output   | --   | 477/8 | 500/-- |    |
|  |                      | 9VDC/12VDC output  | --   | 471/8 | 494/-- |    |
|  |                      | 15VDC/24VDC output | --   | 466/8 | 488/-- |    |
| Reflected Ripple Current*              |                      | --                 | 15   | --    |        |    |
| Surge Voltage (1sec. max.)             |                      | -0.7               | --   | 9     | VDC    |    |
| Input Filter                           |                      | Capacitance filter |      |       |        |    |
| Hot Plug                               |                      | Unavailable        |      |       |        |    |

Note: \*Reflected ripple current testing method please refer to DC-DC Converter Application Note for specific operation.

## Output Specifications

| Item                     | Operating Conditions         | Min.                                    | Typ.  | Max. | Unit  |    |
|--------------------------|------------------------------|---|-------|------|-------|----|
| Voltage Accuracy         |                              | See output regulation curve (Fig. 1)    |       |      |       |    |
| Linear Regulation        | Input voltage change:<br>±1% | 3.3VDC output                           | --    | --   | ±1.5  | -- |
|                          |                              | 5VDC/7VDC/9VDC/12VDC/15VDC/24VDC output | --    | --   | ±1.2  |    |
| Load Regulation          | 10%-100% load                | 3.3VDC output                           | --    | 10   | 20    | %  |
|                          |                              | 5VDC/7VDC output                        | --    | 9    | 15    |    |
|                          |                              | 9VDC output                             | --    | 8    | 10    |    |
|                          |                              | 12VDC/15VDC output                      | --    | 7    | 10    |    |
|                          |                              | 24VDC output                            | --    | 6    | 10    |    |
| Ripple & Noise*          | 20MHz bandwidth              | --                                      | 75    | 200  | mVp-p |    |
| Temperature Coefficient  | Full load                    | --                                      | ±0.02 | --   | %/°C  |    |
| Short-circuit Protection |                              | Continuous, self-recovery               |       |      |       |    |

# DC/DC Converter

## SB05\_XT-2WR3 Series

Note: \* The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

### General Specifications

| Item                             | Operating Conditions  | Min.   | Typ. | Max. | Unit               |
|----------------------------------|---|--|------|------|--------------------|
| Isolation                        | Input-output electric strength test for 1 minute with a leakage current of 1mA max. | 1500   | --   | --   | VDC                |
| Insulation Resistance            | Input-output resistance at 500VDC   | 1000   | --   | --   | MΩ                 |
| Isolation Capacitance            | Input-output capacitance at 100kHz/0.1V   | --   | 20   | --   | pF                 |
| Operating Temperature            | Derating when operating temperature $\geq 85^{\circ}\text{C}$ . (see Fig. 2)        | -40  | --   | 105  | $^{\circ}\text{C}$ |
| Storage Temperature              |   | -55  | --   | 125  |                    |
| Case Temperature Rise            | $T_a=25^{\circ}\text{C}$  | --   | 25   | --   |                    |
| Storage Humidity                 | Non-condensing  | 5  | --   | 95   | %RH                |
| Reflow Soldering Temperature*    |   | Peak temp. $T_c \leq 245^{\circ}\text{C}$ , maximum duration time $\leq 60\text{s}$ over $217^{\circ}\text{C}$ |      |      |                    |
| Vibration                        |   | 10-150Hz, 5G, 0.75mm. along X, Y and Z   |      |      |                    |
| Switching Frequency              | Full load, nominal input voltage  | --   | 220  | --   | kHz                |
| MTBF                             | MIL-HDBK-217F@ $25^{\circ}\text{C}$   | 3500   | --   | --   | k hours            |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D.1  | Level 1  |      |      |                    |

Note: \* See also IPC/JEDEC J-STD-020D.1.

### Mechanical Specifications

|                |   |
|----------------|---|
| Case Material  | Black plastic; flame-retardant and heat-resistant (UL94V-0) |
| Dimensions     | 13.20 x 11.40 x 7.25 mm                                     |
| Weight         | 1.4g(Typ.)  |
| Cooling Method | Free air convection   |

### Electromagnetic Compatibility (EMC)

|           |     |                 |  |
|-----------|-----|-----------------|--|
| Emissions | CE  | CISPR32/EN55032 | CLASS B (see Fig. 4 for recommended circuit)                     |
|           | RE  | CISPR32/EN55032 | CLASS B (see Fig. 4 for recommended circuit)                     |
| Immunity  | ESD | IEC/EN61000-4-2 | Air $\pm 8\text{kV}$ , Contact $\pm 6\text{kV}$ perf. Criteria B |

### Typical Characteristic Curves

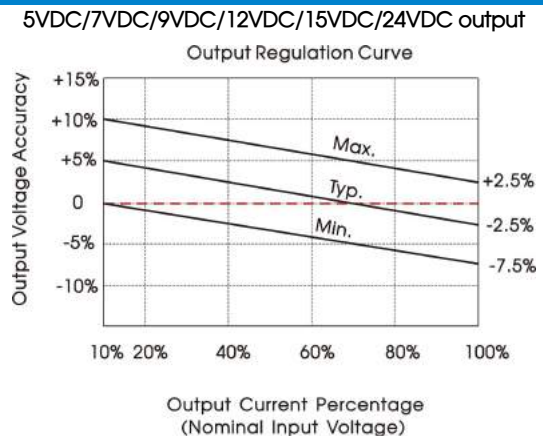
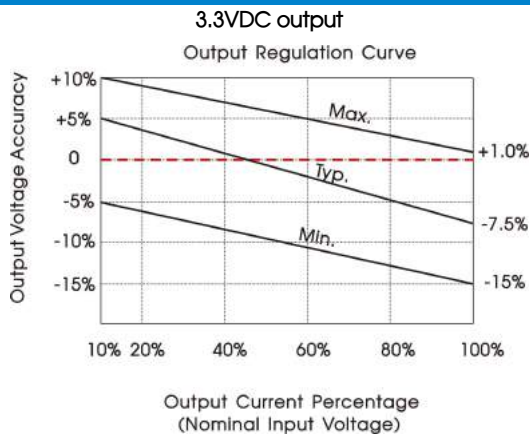


Fig. 1

# DC/DC Converter

## SB05\_XT-2WR3 Series



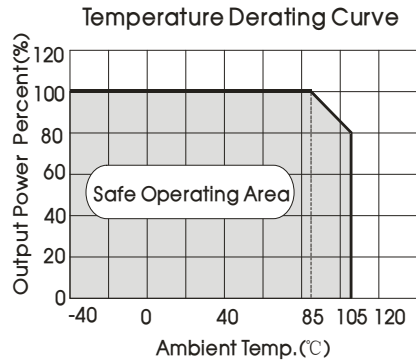


Fig. 2

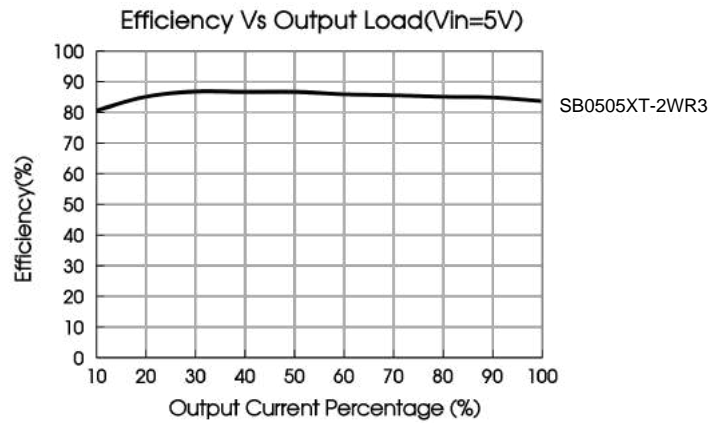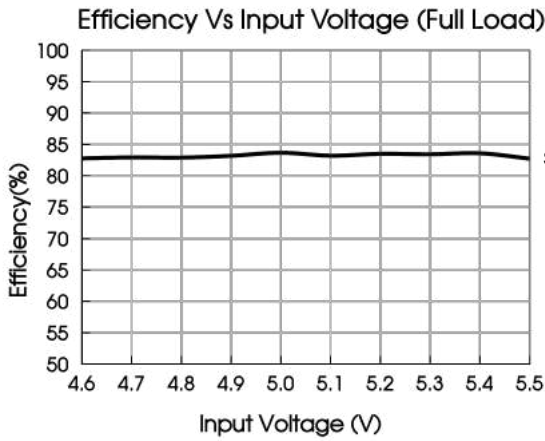

## Design Reference

### 1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.



Fig.3

Table 1: Recommended input and output capacitor values

| Vin  | Cin       | Vo          | Cout       |
|------|-----------|-------------|------------|
| 5VDC | 4.7μF/16V | 3.3VDC/5VDC | 10μF/16V   |
| --   | --        | 7VDC/9VDC   | 4.7μF/16V  |
| --   | --        | 12VDC       | 2.2μF/25V  |
| --   | --        | 15VDC       | 1μF/25V    |
| --   | --        | 24VDC       | 0.47μF/50V |

### 2. EMC compliance circuit

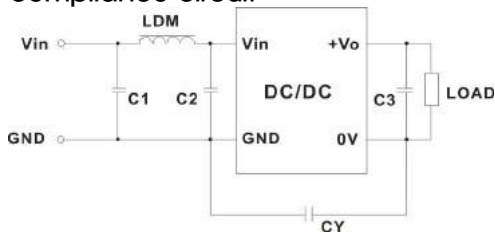


Fig. 4


| Emissions | Component | Value                       |
|-----------|-----------|-----------------------------|
| Emissions | C1, C2    | 4.7μF / 16V                 |
|           | C3        | Refer to the Cout in Fig. 3 |
|           | CY        | 270pF/2kV                   |
|           | LDM       | 6.8μH                       |

# DC/DC Converter


## SB05\_XT-2WR3 Series

### Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

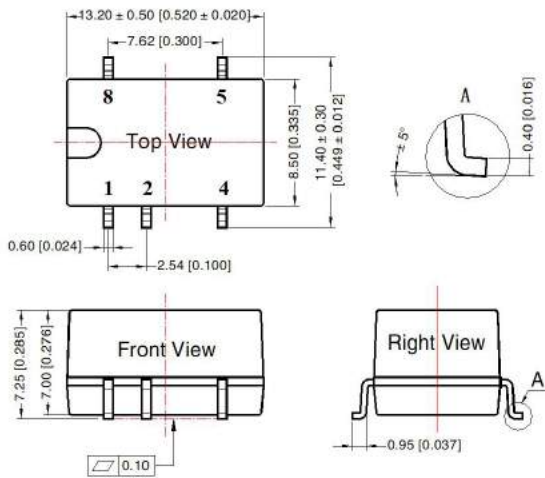

Note:  
 Unit: mm[inch]  
 Pin section tolerances: ± 0.10 [± 0.004]  
 General tolerances: ± 0.25 [± 0.010]




Note: Grid 2.54\*2.54mm

| Pin-Out |      |
|---------|------|
| Pin     | Mark |
| 1       | GND  |
| 2       | Vin  |
| 4       | 0V   |
| 5       | +Vo  |
| 8       | NC   |

NC: Pin to be isolated from circuitry

### Tape and Reel Info

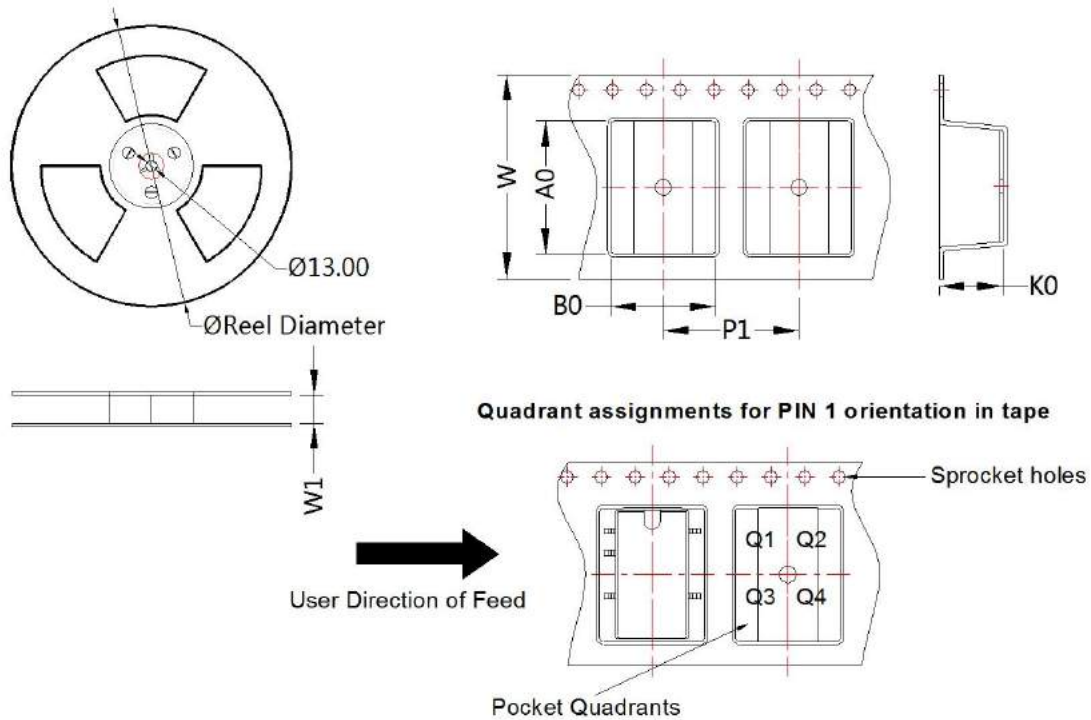

| Device     | Package Type | Pin | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----|-----|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SB_XT-2WR3 | SMD          | 5   | 500 | 330.0              | 24.5               | 13.4    | 11.7    | 7.5     | 16.0    | 24.0   | Q1            |

# DC/DC Converter

## SB05\_XT-2WR3 Series

---

### Notes:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.