



FEATURES

- Universal 90 - 264VAC or 120 - 370VDC Input voltage
- Operating ambient temperature range: -30°C to +70°C
- High efficiency, high reliability and long life
- LED indicator for power on
- Output short circuit, over-current, over-voltage protection
- High I/O isolation test voltage up to 3000VAC
- Withstand 5G vibration test
- Operating altitude up to 5000m



SLM100-10Dxx series of power converter design features two isolated output versions, which can independently supply two different loads in the system that need to be isolated from each other. The products can be used in harsh working environments with an ambient temperature range from -30°C to +70°C, without the need of a fan for further heat dissipation. In addition, the converters EMC immunity performance meets the requirements of IEC61000 standard and meet emission standard CISPR32/EN55032, class B without any external components, thus providing excellent EMC protection. The products also meet IEC/EN/UL62368, EN60335, GB4943 safety standards. The converters integrate a variety of protection features and offer a high-performance to low-cost ratio providing the best power solution for a variety of industries such as industrial control equipment, instrumentation and smart home and building equipment application.

Selection Guide

Certification	Part No.*	Output Power	Rated Output Voltage and Current (Vo/Io)		Working Current Range*		Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)	
			Vo1/Io1	Vo2/Io2	Io1	Io2		Vo1	Vo2
BIS UKCA EN	SLM100-10D0524-30	97W	+5V/5.0A	+24V/3.0A	0.5-7.0A	0.3-3.5A	85	5000	3000
	SLM100-10D1224-20	96W	+12V/4.0A	+24V/2.0A	0.4-6.0A	0.2-3.0A	87	4000	2000

Note: 1.*Working current range: If any one of the 2 outputs arrive at the maximum current, the other output with 50% rated load, the total output power cannot exceed the rated power and working time < 3s, the output voltage accuracy of vo2 is ±8.0%;
2.*Use suffix "Q" for conformal coating.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input	90	--	264	VAC	
	DC input	120	--	370	VDC	
Input Frequency		47	--	63	Hz	
Input Current	115VAC	--	--	2.5	A	
	230VAC	--	--	1.5		
Inrush Current	115VAC	Cold start	--	30		--
	230VAC		--	50		--
Leakage Current	240VAC	<2.0mA				
Hot Plug		Unavailable				

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit		
Output Voltage Accuracy	Full load range	Vo1	--	±2	--	%	
		Vo2	SLM100-10D0524-30	--	±5.0		--
			SLM100-10D1224-20	--	±5.0		--
Line Regulation	Full load	Vo1	--	±0.5	--		
		Vo2	SLM100-10D0524-30	--	±2.0		--
			SLM100-10D1224-20	--	±1.0		--
Load Regulation	10% - 100% load (Balanced load)	Vo1	--	±2.0	--		
		Vo2	SLM100-10D0524-30	--	±5.0	--	
			SLM100-10D1224-20	--	±5.0	--	

AC/DC 100W Enclosed Switching Power Supply

SLM100-10Dxx, SLM100-10Dxx-Q Series

Ripple & Noise*	20MHz bandwidth (peak-peak value)	Vo1	--	80	--	mV
		Vo2	SLM100-10D0524-30	--	200	
			SLM100-10D1224-20	--	150	--
Temperature Coefficient	Vo1	--	±0.03		--	%/°C
Voltage Adjustable Range (Vo1)*	Rated input voltage	SLM100-10D0524-30	4.75	--	5.50	VDC
		SLM100-10D1224-20	11.4	--	13.2	
Switching Delay Time	Rated input voltage	--	--	2.0	s	
Hold-up Time	115VAC	5	--	--	ms	
	230VAC	30	--	--		
Min. Load	Refer to the working current range					
Short Circuit Protection	Recovery time <5s after the short circuit disappear	Hiccup, continuous, self-recover				
Over-current Protection	Dual output with balanced load	≥110%Io, self-recover				
Over-voltage Protection (Vo1)	SLM100-10D0524-30	5.75VDC ≤ Vo1 ≤ 6.75VDC (Output shut down)				
	SLM100-10D1224-20	13.8VDC ≤ Vo1 ≤ 15.8VDC (Output shut down)				

Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information;
2.*When Vo1 working in the adjustable range, the output power please refer to power derating curve and should not be exceed the rated output power.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation Voltage	Input - output	3000	--	--	VAC	
	Input - ⊕	2000	--	--		
	Output - ⊕	500	--	--		
	Vo1 - Vo2	500	--	--	VDC	
Insulation Resistance	Input - output	100	--	--	MΩ	
	Input - ⊕	100	--	--		
	Output - ⊕	100	--	--		
Operating Temperature		-30	--	+70	°C	
Storage Temperature		-40	--	+85		
Operating Humidity	Non-condensing	20	--	90	%RH	
Storage Humidity		10	--	95		
Power Derating	Input voltage derating	90VAC - 115VAC	0.8	--	--	%/VAC
		115VAC - 264VAC	0	--	--	
		120VDC - 160VDC	0.5	--	--	%/VDC
		160VDC - 370VDC	0	--	--	
	Operating temperature derating	-30°C to +40°C	0	--	--	%/°C
		+40°C to +70°C	2.0	--	--	
Safety Standard	IS 13252 (Part1) Safety Approval & EN/BS EN 62368-1 (Report) Design refer to IEC/UL62368-1, EN60335-1, GB4943.1					
Safety Class	CLASS I					
MTBF	MIL-HDBK-217F@25°C	>300,000 h				

Physical Specifications

Case Material	Metal (AL1100, SGCC)
Dimension	159.00 x 97.00 x 30.00 mm
Weight	415g (Typ.)
Cooling Method	Free air convection



AC/DC 100W Enclosed Switching Power Supply

SLM100-10Dxx, SLM100-10Dxx-Q Series

EMC Specifications

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$ /line to ground $\pm 4\text{KV}$	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations	IEC/EN61000-4-11	0%, 70%	perf. Criteria B


Product Characteristic Curve

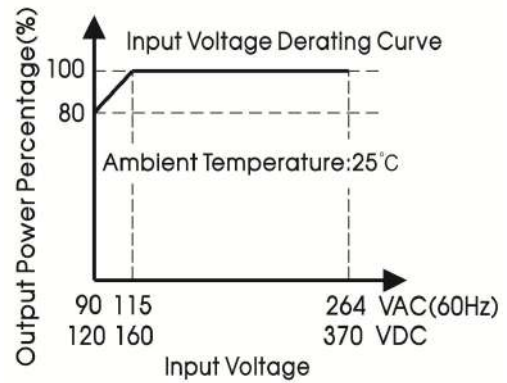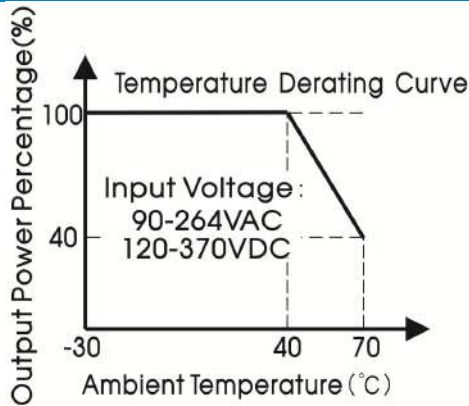


Note: 1. With an AC input voltage between 90-115VAC and a DC input between 120-160VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult SCHMID-M FAE.

Efficiency Vs Output Load ($V_{in}=230\text{VAC}$)

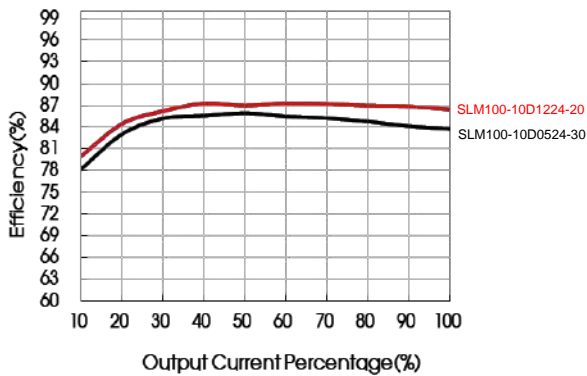


Efficiency Vs Input Voltage (Full Load)

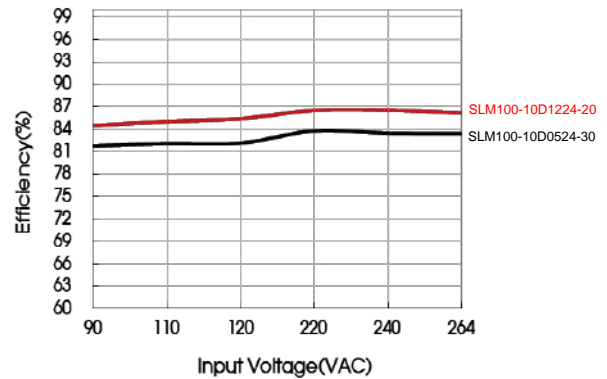

AC/DC 100W Enclosed Switching Power Supply

SLM100-10Dxx, SLM100-10Dxx-Q Series

Dimensions and Recommended Layout

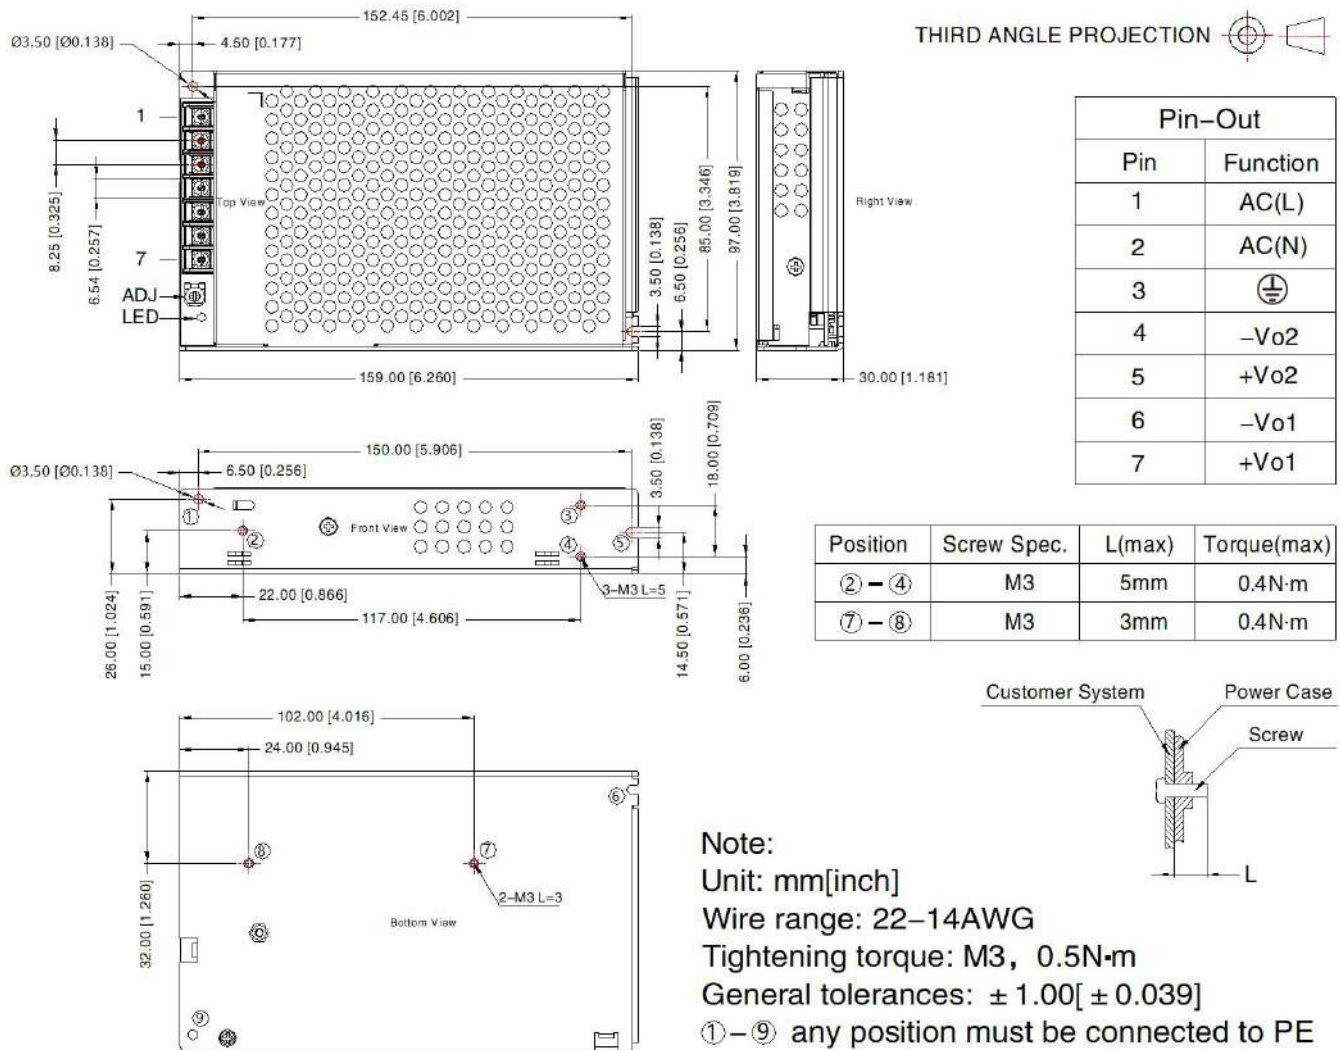

Note:

- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency, there will be audible noise generated when work at light load, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
- CAUTION: Double pole, neutral fusing. Disconnect mains before servicing."/ "ATTENTION: Double pôle/fusible sur le neutre. Débrancher l'alimentation avant l'entretien;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.